

fd multi 1-24e
DALI/DSI LED dimmer

Digital LED dimmer with 6A constant voltage output for smooth control, especially in lower dimming range.



Properties

- Robust constant voltage dimmer with high current capacity
- Protected against short-circuit and overtemperature
- Smooth dimming control even in the lowest range
- Dimming curve matched to eye sensitivity
- Digital control with DSI or DALI control devices
- Plastic housing construction with cable grip

Ordering Information

Product name	fd multi 1-24e
Item number	0000 0303

Available Versions



fd dali 3-24e

Combinable with the following feno products



fd booster 1-24e



fc s.multi 4d




fi dmx-dsi 1e



fi dmx-dali 1e

fd multi 1-24e
DALI/DSI LED dimmer

Wiring Diagram

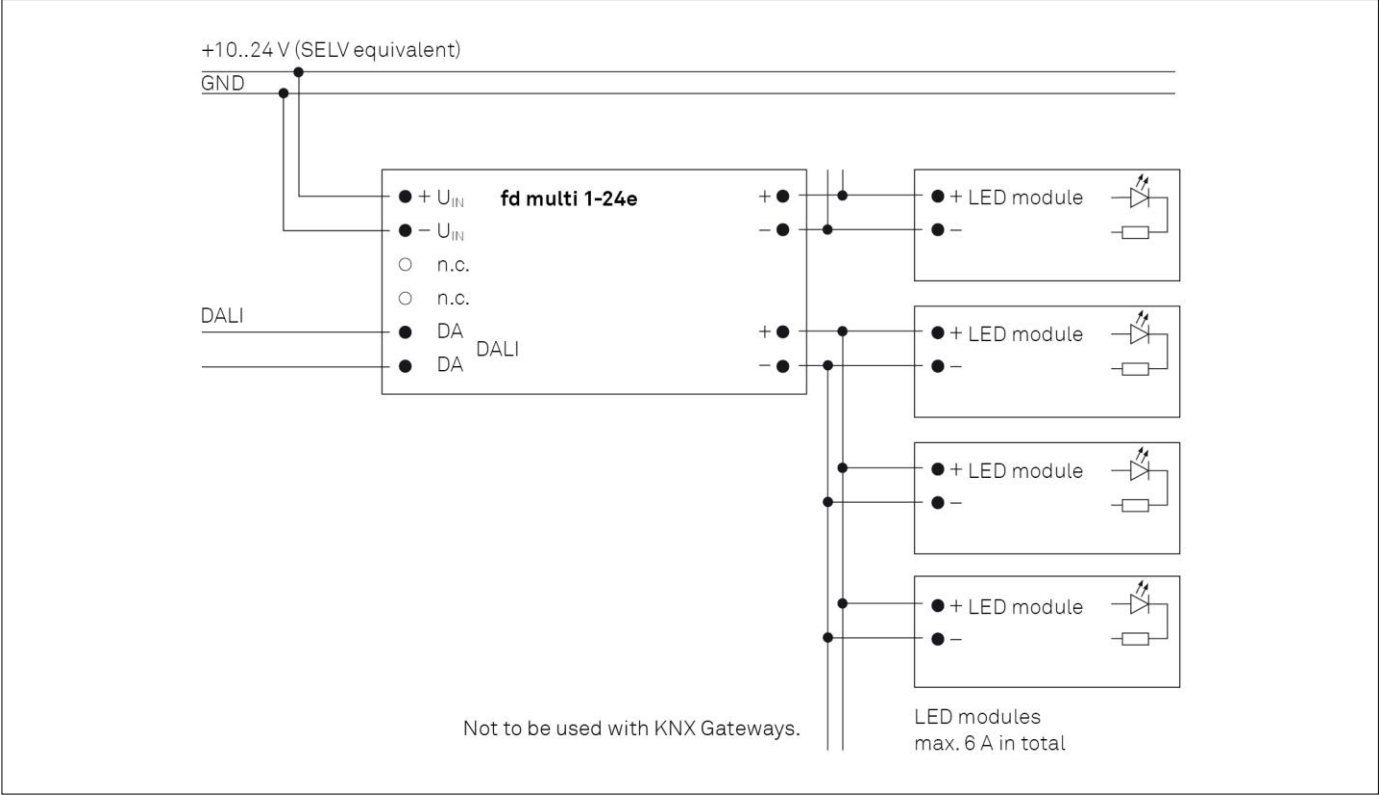

Technical Details	
Supply voltage	10..24 V DC (SELV)
Power consumption	6,2 A max.
Control inputs	1
Control signal	DALI / DSI
Operating mode	Constant voltage
Outputs	1
Dimming frequency / internal	240 Hz/16 Bit
Output voltage	10..24 V DC
Output load	1 x 6 A
Galvanic isolation	yes
Outputs short circuit proof	yes
Ambient temperature	-20..45 °C
Dimensions (L/W/H)	167 x 42 x 31 mm
Weight	90 g

Additional Information

- Not for use in EIB/KNX-Gateways

Standards

- EN 61347-1
- EN 61347-2-11
- EN 61347-2-13
- EN 55015
- EN 61547
- EN 61000-3-2
- EN 61000-3-3