

PCA T5 BASIC Ip xitec II, 14 – 80 W BASIC T5

Product description



- Processor-controlled ballast with xitec II inside
- Highest possible energy class CELMA EEI = A1 BAT[®]
- Noise-free precise control via DSI signal, switchDIM or corridorFUNCTION
- Nominal life up to 100,000 h (at ta 50 °C with a failure rate max. 0.2 % per 1,000 h)
- 5-year guarantee

Interfaces

- DSI
- switchDIM (with memory function)
- corridorFUNCTION (3 preprogrammed profiles)
- Integrated SMART interface for function with SMART Sensor 5D 19f and corridorFUNCTION plugs

Functions

- Intelligent Temperature Guard (overtemperature protection)
- Intelligent Voltage Guard (overvoltage indication and undervoltage shutdown)
- Optimum filament heating in any dimmer setting
- Disconnection of filament heating from a dimming level of approx. 90 % for maximum energy efficiency (SMART-Heating concept)
- corridorFUNCTION with ambient light control
- Automatically triggered emergency lighting value in DC mode, 15 %
- For emergency lighting systems as per EN 50172
- Automatic start after replacement of defective lamps
- Automatic shutdown if the lamp is faulty

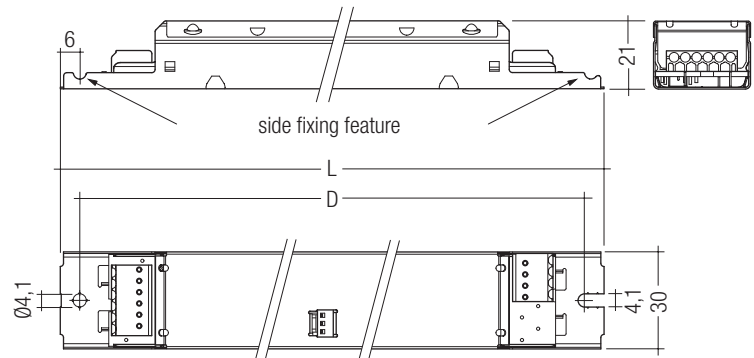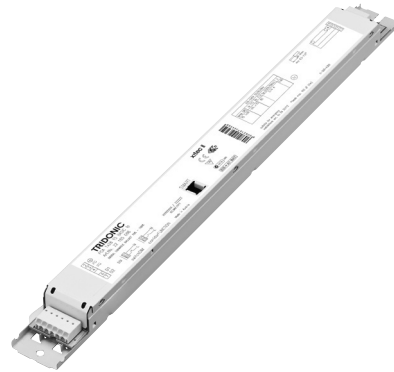

Technical data

Mains voltage range	220 – 240 V
AC voltage range	198 – 264 V
DC voltage range	176 – 280 V (lamp start \geq 198 V DC)
Mains frequency	0 / 50 / 60 Hz
Overvoltage protection	320 V AC, 1 h
Typ. power input on standby	< 0.2 W
Protective hot restart	0.5 s for AC / 0.2 s for DC
Dimming range	10 – 100 %
Lamp start possible from	10 %
Operating frequency	~ 40 – 130 kHz
Type of protection	IP20

Ordering data

Type	Article number	Packaging, carton	Packaging, pallet	Weight per pc.
For luminaires with 1 lamp				
PCA 1x14 T5 BASIC Ip xitec II	22185076	10 pc(s).	760 pc(s).	0.230 kg
PCA 1x21 T5 BASIC Ip xitec II	22185090	10 pc(s).	760 pc(s).	0.231 kg
PCA 1x24 T5 BASIC Ip xitec II	22185078	10 pc(s).	760 pc(s).	0.229 kg
PCA 1x28 T5 BASIC Ip xitec II	22185086	10 pc(s).	760 pc(s).	0.240 kg
PCA 1x35 T5 BASIC Ip xitec II	22185080	10 pc(s).	760 pc(s).	0.240 kg
PCA 1x39 T5 BASIC Ip xitec II	22185092	10 pc(s).	760 pc(s).	0.232 kg
PCA 1x49 T5 BASIC Ip xitec II	22185082	10 pc(s).	760 pc(s).	0.240 kg
PCA 1x54 T5 BASIC Ip xitec II	22185088	10 pc(s).	760 pc(s).	0.240 kg
PCA 1x80 T5 BASIC Ip xitec II	22185084	10 pc(s).	760 pc(s).	0.240 kg



Standards, page 3

Wiring diagrams and installation examples, page 8

Ordering data

Type	Article number	Packaging, carton	Packaging, pallet	Weight per pcs.
For luminaires with 2 lamps				
PCA 2x14 T5 BASIC lp xrtec II	22185077	10 pc(s).	760 pc(s).	0.266 kg
PCA 2x21 T5 BASIC lp xrtec II	22185091	10 pc(s).	760 pc(s).	0.267 kg
PCA 2x24 T5 BASIC lp xrtec II	22185079	10 pc(s).	760 pc(s).	0.267 kg
PCA 2x28 T5 BASIC lp xrtec II	22185087	10 pc(s).	640 pc(s).	0.330 kg
PCA 2x35 T5 BASIC lp xrtec II	22185081	10 pc(s).	760 pc(s).	0.260 kg
PCA 2x39 T5 BASIC lp xrtec II	22185093	10 pc(s).	760 pc(s).	0.270 kg
PCA 2x49 T5 BASIC lp xrtec II	22185083	10 pc(s).	760 pc(s).	0.260 kg
PCA 2x54 T5 BASIC lp xrtec II	22185089	10 pc(s).	640 pc(s).	0.328 kg
PCA 2x80 T5 BASIC lp xrtec II	22185085	10 pc(s).	640 pc(s).	0.339 kg

Specific technical data

Lamp wattage	Lamp type	Type	Article number	Dimensions L x W x H	Hole spacing D	Lamp power ^①	Circuit power ^②	EEL	Current at 50 Hz 230 V ^②	λ at 50 Hz 230 V	tc point max.	Ambient temperature ta ^③
For luminaires with 1 lamp												
1 x 14 W	T5	PCA 1x14 T5 BASIC lp xrtec II	22185076	360 x 30 x 21 mm	350 mm	14 W	16.0 W	A1 BAT	0.08 A	0.95	80 °C	-25 ... 70 °C
1 x 21 W	T5	PCA 1x21 T5 BASIC lp xrtec II	22185090	360 x 30 x 21 mm	350 mm	21 W	23.0 W	A1 BAT	0.11 A	0.95	80 °C	-25 ... 70 °C
1 x 24 W	T5	PCA 1x24 T5 BASIC lp xrtec II	22185078	360 x 30 x 21 mm	350 mm	23 W	25.5 W	A1 BAT	0.12 A	0.97	80 °C	-25 ... 70 °C
1 x 28 W	T5	PCA 1x28 T5 BASIC lp xrtec II	22185086	360 x 30 x 21 mm	350 mm	28 W	30.5 W	A1 BAT	0.14 A	0.95	80 °C	-25 ... 75 °C
1 x 35 W	T5	PCA 1x35 T5 BASIC lp xrtec II	22185080	360 x 30 x 21 mm	350 mm	35 W	39.0 W	A1 BAT	0.18 A	0.95	85 °C	-25 ... 75 °C
1 x 36 W	TC-L	PCA 1x39 T5 BASIC lp xrtec II	22185092	360 x 30 x 21 mm	350 mm	32 W	35.5 W	A1 BAT	0.16 A	0.96	80 °C	-25 ... 65 °C
1 x 39 W	T5	PCA 1x39 T5 BASIC lp xrtec II	22185092	360 x 30 x 21 mm	350 mm	38 W	41.5 W	A1 BAT	0.19 A	0.97	80 °C	-25 ... 65 °C
1 x 40 W	TC-L	PCA 1x39 T5 BASIC lp xrtec II	22185092	360 x 30 x 21 mm	350 mm	40 W	43.0 W	A1 BAT	0.20 A	0.98	80 °C	-25 ... 65 °C
1 x 49 W	T5	PCA 1x49 T5 BASIC lp xrtec II	22185082	360 x 30 x 21 mm	350 mm	49 W	53.0 W	A1 BAT	0.25 A	0.97	80 °C	-25 ... 70 °C
1 x 54 W	T5	PCA 1x54 T5 BASIC lp xrtec II	22185088	360 x 30 x 21 mm	350 mm	54 W	58.0 W	A1 BAT	0.26 A	0.98	80 °C	-25 ... 70 °C
1 x 55 W	TC-L	PCA 1x80 T5 BASIC lp xrtec II	22185084	360 x 30 x 21 mm	350 mm	55 W	60.0 W	A1 BAT	0.28 A	0.97	80 °C	-25 ... 60 °C
1 x 80 W	T5	PCA 1x80 T5 BASIC lp xrtec II	22185084	360 x 30 x 21 mm	350 mm	80 W	85.5 W	A1 BAT	0.40 A	0.99	80 °C	-25 ... 60 °C
1 x 80 W	TC-L	PCA 1x80 T5 BASIC lp xrtec II	22185084	360 x 30 x 21 mm	350 mm	80 W	85.5 W	A1 BAT	0.36 A	0.98	80 °C	-25 ... 60 °C
For luminaires with 2 lamps												
2 x 14 W	T5	PCA 2x14 T5 BASIC lp xrtec II	22185077	360 x 30 x 21 mm	350 mm	28 W	30.5 W	A1 BAT	0.14 A	0.96	80 °C	-25 ... 70 °C
2 x 21 W	T5	PCA 2x21 T5 BASIC lp xrtec II	22185091	360 x 30 x 21 mm	350 mm	41 W	45.5 W	A1 BAT	0.21 A	0.96	85 °C	-25 ... 70 °C
2 x 18 W	TC-L	PCA 2x24 T5 BASIC lp xrtec II	22185079	360 x 30 x 21 mm	350 mm	32 W	38.0 W	A1 BAT	0.15 A	0.96	80 °C	-25 ... 65 °C
2 x 24 W	T5	PCA 2x24 T5 BASIC lp xrtec II	22185079	360 x 30 x 21 mm	350 mm	45 W	49.5 W	A1 BAT	0.22 A	0.98	80 °C	-25 ... 65 °C
2 x 24 W	TC-L	PCA 2x24 T5 BASIC lp xrtec II	22185079	360 x 30 x 21 mm	350 mm	44 W	49.0 W	A1 BAT	0.21 A	0.98	80 °C	-25 ... 65 °C
2 x 28 W	T5	PCA 2x28 T5 BASIC lp xrtec II	22185087	425 x 30 x 21 mm	415 mm	56 W	60.5 W	A1 BAT	0.28 A	0.96	80 °C	-25 ... 70 °C
2 x 35 W	T5	PCA 2x35 T5 BASIC lp xrtec II	22185081	360 x 30 x 21 mm	350 mm	70 W	74.5 W	A1 BAT	0.34 A	0.97	80 °C	-25 ... 65 °C
2 x 36 W	TC-L	PCA 2x39 T5 BASIC lp xrtec II	22185093	360 x 30 x 21 mm	350 mm	64 W	71.0 W	A1 BAT	0.31 A	0.98	85 °C	-25 ... 65 °C
2 x 39 W	T5	PCA 2x39 T5 BASIC lp xrtec II	22185093	360 x 30 x 21 mm	350 mm	76 W	82.0 W	A1 BAT	0.37 A	0.98	85 °C	-25 ... 65 °C
2 x 40 W	TC-L	PCA 2x39 T5 BASIC lp xrtec II	22185093	360 x 30 x 21 mm	350 mm	80 W	86.0 W	A1 BAT	0.40 A	0.99	85 °C	-25 ... 65 °C
2 x 49 W	T5	PCA 2x49 T5 BASIC lp xrtec II	22185083	360 x 30 x 21 mm	350 mm	98 W	105.5 W	A1 BAT	0.49 A	0.98	80 °C	-25 ... 60 °C
2 x 54 W	T5	PCA 2x54 T5 BASIC lp xrtec II	22185089	425 x 30 x 21 mm	415 mm	108 W	117.0 W	A1 BAT	0.51 A	0.99	85 °C	-25 ... 55 °C
2 x 55 W	TC-L	PCA 2x80 T5 BASIC lp xrtec II	22185085	425 x 30 x 21 mm	415 mm	110 W	116.5 W	A1 BAT	0.52 A	0.99	80 °C	-25 ... 55 °C
2 x 80 W	T5	PCA 2x80 T5 BASIC lp xrtec II	22185085	425 x 30 x 21 mm	415 mm	160 W	167.0 W	A1 BAT	0.74 A	0.99	80 °C	-25 ... 55 °C

① According to the EU directives on ecodesign requirements (EC) No. 245/2009 and (EC) No. 347/2010.

② Valid at 100 % dimming level.

③ +10 °C to ta max: unrestricted dimming. -25 °C to +10 °C: unrestricted dimming from 100 % to 30 %.

-25 °C to +10 °C, dimming below 30 %: malfunction possible but no damage to ECG. This applies to AC and DC operation.

Standards

EN 55015
EN 60929
EN 61000-3-2
EN 61347-2-3
EN 61547
Suitable for emergency installations according to EN 50172
CISPR 15
CISPR 22
IEC 60929
IEC 61000-3-2
IEC 61347-2-3
IEC 61547

Lamp starting characteristics

Warm start
Starting time 0.5 s with AC
Starting time 0.2 s with DC
Start at dimming level from 10 – 100 %

AC operation

Mains voltage
220–240 V 50/60 Hz
198–264 V 50/60 Hz including safety tolerance ($\pm 10\%$)
202–254 V 50/60 Hz including performance tolerance ($+6\% / -8\%$)

DC operation

220–240 V 0 Hz
198–280 V 0 Hz certain lamp start
176–280 V 0 Hz operating range
Use in emergency lighting installations according to EN 50172 or for emergency luminaires according to EN 61347-2-3 appendix J.

Mains current for defective or missing lamps at DC operation < 35 mA.

Light output level in DC operation

Default value is 15 %.
EBLF = 0.5 x adjusted DC dimming level (e.g. 0.5 x 0.7).

Emergency units

The "PCA T5 BASIC Ip xitec II" ballasts are compatible with all emergency units from Tridonic. See the table in the data sheet. Also all "5-pole" emergency units can be used. When used with other emergency units tests are necessary.

Temperature range

Unlimited dimming range from 10 °C to ta max.
-25 °C to 10 °C: dimming operation from 100 % to 30 %. If dimm level goes below 30 % malfunction possible, but no electronic ballast damage.
This applies to AC and DC operation.

Mains currents in DC operation (at 15 % light output)

Type	Lamp type	Wattage	Mains current at $U_n = 220\text{ V}_{ac}$	Mains current at $U_n = 275\text{ V}_{ac}$
PCA 1x14 T5 BASIC Ip xitec II	T5	1x14 W	0.04 A	0.04 A
PCA 1x21 T5 BASIC Ip xitec II	T5	1x21 W	0.05 A	0.04 A
PCA 1x24 T5 BASIC Ip xitec II	T5	1x24 W	0.05 A	0.05 A
PCA 1x28 T5 BASIC Ip xitec II	T5	1x28 W	0.06 A	0.06 A
PCA 1x35 T5 BASIC Ip xitec II	T5	1x35 W	0.07 A	0.06 A
PCA 1x39 T5 BASIC Ip xitec II	TC-L	1x36 W	0.07 A	0.06 A
PCA 1x39 T5 BASIC Ip xitec II	T5	1x39 W	0.07 A	0.07 A
PCA 1x39 T5 BASIC Ip xitec II	TC-L	1x40 W	0.07 A	0.06 A
PCA 1x49 T5 BASIC Ip xitec II	T5	1x49 W	0.09 A	0.08 A
PCA 1x54 T5 BASIC Ip xitec II	T5	1x54 W	0.11 A	0.10 A
PCA 1x80 T5 BASIC Ip xitec II	TC-L	1x55 W	0.11 A	0.10 A
PCA 1x80 T5 BASIC Ip xitec II	T5	1x80 W	0.14 A	0.13 A
PCA 1x80 T5 BASIC Ip xitec II	TC-L	1x80 W	0.13 A	0.12 A
PCA 2x14 T5 BASIC Ip xitec II	T5	2x14 W	0.07 A	0.06 A
PCA 2x21 T5 BASIC Ip xitec II	T5	2x21 W	0.08 A	0.07 A
PCA 2x24 T5 BASIC Ip xitec II	TC-L	2x18 W	0.07 A	0.06 A
PCA 2x24 T5 BASIC Ip xitec II	T5	2x24 W	0.09 A	0.09 A
PCA 2x24 T5 BASIC Ip xitec II	TC-L	2x24 W	0.10 A	0.09 A
PCA 2x28 T5 BASIC Ip xitec II	T5	2x28 W	0.10 A	0.10 A
PCA 2x35 T5 BASIC Ip xitec II	T5	2x35 W	0.12 A	0.11 A
PCA 2x39 T5 BASIC Ip xitec II	TC-L	2x36 W	0.12 A	0.11 A
PCA 2x39 T5 BASIC Ip xitec II	T5	2x39 W	0.13 A	0.12 A
PCA 2x39 T5 BASIC Ip xitec II	TC-L	2x40 W	0.13 A	0.12 A
PCA 2x49 T5 BASIC Ip xitec II	T5	2x49 W	0.16 A	0.15 A
PCA 2x54 T5 BASIC Ip xitec II	T5	2x54 W	0.20 A	0.18 A
PCA 2x80 T5 BASIC Ip xitec II	TC-L	2x55 W	0.20 A	0.19 A
PCA 2x80 T5 BASIC Ip xitec II	T5	2x80 W	0.27 A	0.25 A

Ballast lumen factor AC operation (AC-BLF) EN 60929 8.1

Type	Lamp type	Wattage	AC-BLF at $U = 230\text{ V}_{ac}$
PCA 1x14 T5 BASIC Ip xitec II	T5	1x14 W	1.00
PCA 1x21 T5 BASIC Ip xitec II	T5	1x21 W	0.99
PCA 1x24 T5 BASIC Ip xitec II	T5	1x24 W	1.01
PCA 1x28 T5 BASIC Ip xitec II	T5	1x28 W	0.98
PCA 1x35 T5 BASIC Ip xitec II	T5	1x35 W	1.00
PCA 1x39 T5 BASIC Ip xitec II	TC-L	1x36 W	0.97
PCA 1x39 T5 BASIC Ip xitec II	T5	1x39 W	1.01
PCA 1x39 T5 BASIC Ip xitec II	TC-L	1x40 W	1.05
PCA 1x49 T5 BASIC Ip xitec II	T5	1x49 W	1.00
PCA 1x54 T5 BASIC Ip xitec II	T5	1x54 W	1.02
PCA 1x80 T5 BASIC Ip xitec II	TC-L	1x55 W	1.02
PCA 1x80 T5 BASIC Ip xitec II	T5	1x80 W	1.02
PCA 1x80 T5 BASIC Ip xitec II	TC-L	1x80 W	1.04
PCA 2x14 T5 BASIC Ip xitec II	T5	2x14 W	1.01
PCA 2x21 T5 BASIC Ip xitec II	T5	2x21 W	0.97
PCA 2x24 T5 BASIC Ip xitec II	TC-L	2x18 W	0.90
PCA 2x24 T5 BASIC Ip xitec II	T5	2x24 W	1.00
PCA 2x24 T5 BASIC Ip xitec II	TC-L	2x24 W	0.98
PCA 2x28 T5 BASIC Ip xitec II	T5	2x28 W	1.00
PCA 2x35 T5 BASIC Ip xitec II	T5	2x35 W	1.01
PCA 2x39 T5 BASIC Ip xitec II	TC-L	2x36 W	0.97
PCA 2x39 T5 BASIC Ip xitec II	T5	2x39 W	0.98
PCA 2x39 T5 BASIC Ip xitec II	TC-L	2x40 W	1.05
PCA 2x49 T5 BASIC Ip xitec II	T5	2x49 W	1.02
PCA 2x54 T5 BASIC Ip xitec II	T5	2x54 W	1.00
PCA 2x80 T5 BASIC Ip xitec II	TC-L	2x55 W	1.03
PCA 2x80 T5 BASIC Ip xitec II	T5	2x80 W	1.02

The ballast lumen factor for AC operation (AC-BLF) does not alter from $U_n = 198\text{ V}_{ac}$ to $U_n = 254\text{ V}_{ac}$.
The ballast lumen factor for DC operation (DC-BLF) on the basis of an automatic power reduction of the ballasts (default value is 15 %) will be smaller than AC. It does not alter in the DC operating range (198–280 V dc).

Dimming

Dimming curve is adapted to the eye sensitiveness.
Dimming range 10 % to 100 %
Digital control with DSI signal:
8 bit Manchester Code
Speed 10 % to 100 % in 0.8 s

Control input (D1, D2)

Digital DSI signal, push-to-make switch (switchDIM) or a motion detector (corridorFUNCTION) can be wired on the same terminals (D1 and D2).

Digital signal DSI

The control input is non-polar and protected against accidental connection with a mains voltage up to 264 V. The control signal is not SELV. Control cable has to be installed in accordance to the requirements of low voltage installations.

Different functions depending on each module.

SMART interface

An additional interface for the direct connection of the SMART-Sensor 5D 19f¹⁾ or corridorFUNCTION plugs. Application and functionality see corridorFUNCTION user manual.

SMART-Sensor 5D 19f¹⁾ light sensor operating mode:

The sensor registers actual ambient light and maintains the individually defined constant lux level.

After every mains reset the SMART interface automatically checks for an installed sensor. With the sensor installed the PCA T5 BASIC Ip xrtec II automatically runs in the constant lux level mode.

ON/OFF switch via mains, switchDIM or DSI signal. DSI signal = 0 switches off,

DSI signal ≥ 1 switches on.

With switchDIM signals it is possible to change the controlled light level temporarily.

Temporarily means that after a switching cycle OFF/ON command the ballast will start at the preset value determined by the SMART-Sensor 5D 19f. The installation of the two wire bus is according to the appropriate low voltage regulations.

¹⁾ SMART-Sensor 5D 19f: article number 86459169

switchDIM

Integrated switchDIM function allows a direct connection of a push to make switch for dimming and switching.

Brief push (< 0.6 s) switches ballast ON and OFF. The ballasts switch-ON at light level set at switch-OFF. After switch ON the last settet dimming level will be activated again.

When the push to make switch is held, PCA ballasts are dimmed. After repush the PCA is dimmed in the opposite direction.


The switchDIM fade time is set to 3 s from min. to max. in the factory settings.

In installations with PCAs with different dimming levels or opposite dimming directions (e.g. after a system extension), all PCAs can be synchronized to 50 % dimming level by a 10 s push.

Use of push to make switch with indicator lamp is not permitted.


switchDIM and corridorFUNCTION are very simple tools for controlling ballasts with conventional momentary-action switches or motion sensors. To ensure correct operation a sinusoidal mains voltage with a frequency of 50 Hz or 60 Hz is required at the control input. Special attention must be paid to achieving clear zero

Dimming characteristics PCA T5 BASIC Ip xrtec II

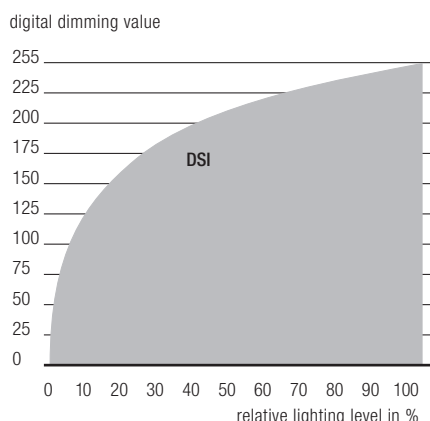

Dimming characteristics as seen by the human eye
Note: The dimming level of BASIC can be different to the graphic (dimming level 10 to 100 %)

Energy saving PCA T5 BASIC Ip xrtec II

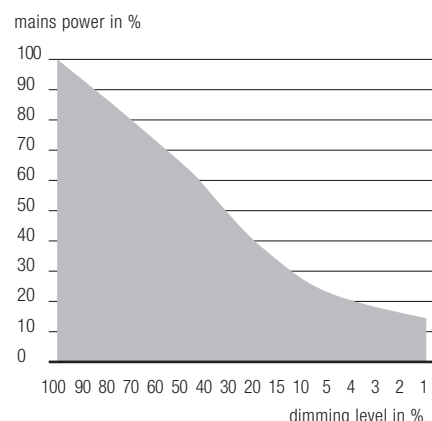

crossings. Serious mains faults may impair the operation of switchDIM and corridorFUNCTION.


corridorFUNCTION

To activate the corridorFUNCTION a voltage of 230 V simply has to be applied for five minutes at switchDIM connection. The unit will then switch automatically to the corridorFUNCTION.


Note: If the corridorFUNCTION is wrongly activated in a switchDIM system (for example a switch is used instead of pushbutton), there is the option of installing a pushbutton and deactivating the corridorFUNCTION mode by five short pushes of the button within three seconds.

The corridorFUNCTION offers the added benefit of a second and third preprogrammed profile, which can be activated by the corridorFUNCTION plugs. It is also possible to combine the corridorFUNCTION with the SMART-Sensor 5D 19f light sensor.


Application and functionality of profiles see user manual of the corridorFUNCTION.

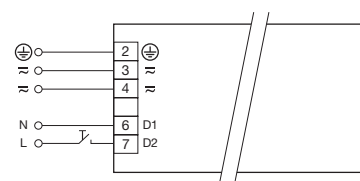

switchDIM PCA T5 BASIC Ip xrtec II

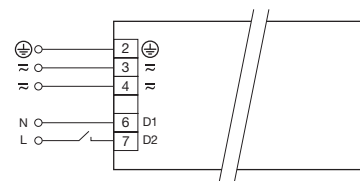

corridorFUNCTION PCA T5 BASIC Ip xrtec II

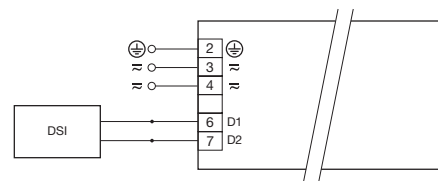

DSI PCA T5 BASIC Ip xrtec II

Dimmable ballasts from Tridonic have to be earthed.

Loading of automatic circuit breakers (Limitation via inrush current)

Automatic circuit breaker type	C10		C13		C16		C20		B10		B13		B16		B20		Inrush current (1.5 mm ²)		Inrush current (2.5 mm ²)	
	1.5 mm ²	1.5 mm ²	1.5 mm ²	2.5 mm ²	1.5 mm ²	2.5 mm ²	1.5 mm ²	2.5 mm ²	1.5 mm ²	2.5 mm ²	1.5 mm ²	2.5 mm ²	1.5 mm ²	2.5 mm ²	1.5 mm ²	2.5 mm ²	I _{max}	time	I _{max}	time
PCA 1x14 T5 BASIC Ip xitec II	50	80	150	180	25	40	75	90	19.3 A	144 μs	19.6 A	147 μs								
PCA 1x21 T5 BASIC Ip xitec II	34	50	76	86	17	25	38	43	25.3 A	190 μs	25.1 A	192 μs								
PCA 1x24 T5 BASIC Ip xitec II	50	80	150	180	25	40	75	90	19.3 A	144 μs	19.6 A	147 μs								
PCA 1x28 T5 BASIC Ip xitec II	22	32	46	52	11	16	23	26	26.6 A	235 μs	28.5 A	223 μs								
PCA 1x35 T5 BASIC Ip xitec II	16	22	28	34	8	11	14	17	31.2 A	271 μs	31.2 A	273 μs								
PCA 1x39 T5 BASIC Ip xitec II	34	50	76	86	17	25	38	43	25.3 A	190 μs	25.1 A	192 μs								
PCA 1x49 T5 BASIC Ip xitec II	16	22	28	34	8	11	14	17	31.2 A	271 μs	31.2 A	273 μs								
PCA 1x54 T5 BASIC Ip xitec II	22	32	46	52	11	16	23	26	26.6 A	235 μs	28.5 A	223 μs								
PCA 1x80 T5 BASIC Ip xitec II	16	22	28	34	8	11	14	17	31.2 A	271 μs	31.2 A	273 μs								
PCA 2x14 T5 BASIC Ip xitec II	22	32	44	50	11	16	22	25	28.1 A	227 μs	28.3 A	227 μs								
PCA 2x21 T5 BASIC Ip xitec II	16	22	28	34	8	11	14	17	37.2 A	207 μs	38.3 A	203 μs								
PCA 2x24 T5 BASIC Ip xitec II	22	32	44	50	11	16	22	25	28.1 A	227 μs	28.3 A	227 μs								
PCA 2x28 T5 BASIC Ip xitec II	16	22	30	36	8	11	15	18	28.9 A	288 μs	30.3 A	282 μs								
PCA 2x35 T5 BASIC Ip xitec II	16	22	30	34	8	11	15	17	33.0 A	241 μs	33.9 A	240 μs								
PCA 2x39 T5 BASIC Ip xitec II	16	22	28	34	8	11	14	17	37.2 A	207 μs	38.3 A	203 μs								
PCA 2x49 T5 BASIC Ip xitec II	16	22	30	34	8	11	15	17	33.0 A	241 μs	33.9 A	240 μs								
PCA 2x54 T5 BASIC Ip xitec II	16	22	30	36	8	11	15	18	28.9 A	288 μs	30.3 A	282 μs								
PCA 2x80 T5 BASIC Ip xitec II	8	12	18	20	4	6	9	10	48.3 A	261 μs	50.1 A	258 μs								

Continuous operation: to calculate the protective safety switch see main current, page 2

Intelligent Voltage Guard

Intelligent Voltage Guard is the name of the electronic monitor from Tridonic. This innovative feature of the PCA family of control gear from Tridonic immediately shows if the mains voltage rises above certain thresholds. Measures can then be taken quickly to prevent damage to the control gear.

- If the mains voltage rises above approx. 318 V_{rms} (voltage depends on the ballast type), the lamp starts flashing on and off.
- To avoid a damage of the device the mains supply has to be switched off at this signal.

Intelligent Temperature Guard

The intelligent temperature guard protects the PCA T5 BASIC Ip xitec II from thermal overheating by reducing the output power or switching off in case of operation above the thermal limits of the luminaire or ballast. Depending on the luminaire design, the ITG operates at about 5 to 10 °C above tc temperature.

Harmonic distortion in the mains supply (at 230 V/50 Hz)

Type	Lamp type	Wattage	THD	3	5	7	9	11
PCA 1x14 T5 BASIC Ip xrttec II	T5	1x14 W	9	6	3	3	1	1
PCA 1x21 T5 BASIC Ip xrttec II	T5	1x21 W	9	4	3	2	2	2
PCA 1x24 T5 BASIC Ip xrttec II	T5	1x24 W	9	6	2	3	1	1
PCA 1x28 T5 BASIC Ip xrttec II	T5	1x28 W	10	4	2	2	2	2
PCA 1x35 T5 BASIC Ip xrttec II	T5	1x35 W	10	6	2	3	3	3
PCA 1x39 T5 BASIC Ip xrttec II	TC-L	1x36 W	8	4	2	1	1	1
PCA 1x39 T5 BASIC Ip xrttec II	T5	1x39 W	7	4	2	1	1	1
PCA 1x39 T5 BASIC Ip xrttec II	TC-L	1x40 W	6	4	1	1	1	1
PCA 1x49 T5 BASIC Ip xrttec II	T5	1x49 W	10	8	3	3	2	2
PCA 1x54 T5 BASIC Ip xrttec II	T5	1x54 W	6	4	1	1	1	1
PCA 1x80 T5 BASIC Ip xrttec II	TC-L	1x55 W	7	5	1	1	1	2
PCA 1x80 T5 BASIC Ip xrttec II	T5	1x80 W	6	5	1	1	1	1
PCA 1x80 T5 BASIC Ip xrttec II	TC-L	1x80 W	6	5	1	1	1	1
PCA 2x14 T5 BASIC Ip xrttec II	T5	2x14 W	8	1	3	1	1	2
PCA 2x21 T5 BASIC Ip xrttec II	T5	2x21 W	10	7	3	4	4	2
PCA 2x24 T5 BASIC Ip xrttec II	TC-L	2x18 W	7	1	2	1	1	2
PCA 2x24 T5 BASIC Ip xrttec II	T5	2x24 W	5	1	2	1	1	1
PCA 2x24 T5 BASIC Ip xrttec II	TC-L	2x24 W	6	1	2	1	1	1
PCA 2x28 T5 BASIC Ip xrttec II	T5	2x28 W	10	7	2	2	2	2
PCA 2x35 T5 BASIC Ip xrttec II	T5	2x35 W	9	5	1	1	2	2
PCA 2x39 T5 BASIC Ip xrttec II	TC-L	2x36 W	7	4	1	1	2	1
PCA 2x39 T5 BASIC Ip xrttec II	T5	2x39 W	6	4	1	1	1	1
PCA 2x39 T5 BASIC Ip xrttec II	TC-L	2x40 W	6	4	1	1	1	1
PCA 2x49 T5 BASIC Ip xrttec II	T5	2x49 W	7	6	1	1	1	1
PCA 2x54 T5 BASIC Ip xrttec II	T5	2x54 W	8	6	1	1	1	1
PCA 2x80 T5 BASIC Ip xrttec II	TC-L	2x55 W	6	4	2	1	1	1
PCA 2x80 T5 BASIC Ip xrttec II	T5	2x80 W	5	4	2	1	1	1

Operating voltage

Type	Lamp type	Wattage	U _{out}
PCA 1x14 T5 BASIC Ip xrttec II	T5	1x14 W	430 V
PCA 1x21 T5 BASIC Ip xrttec II	T5	1x21 W	430 V
PCA 1x24 T5 BASIC Ip xrttec II	T5	1x24 W	430 V
PCA 1x28 T5 BASIC Ip xrttec II	T5	1x28 W	430 V
PCA 1x35 T5 BASIC Ip xrttec II	T5	1x35 W	430 V
PCA 1x39 T5 BASIC Ip xrttec II	TC-L	1x36 W	430 V
PCA 1x39 T5 BASIC Ip xrttec II	T5	1x39 W	430 V
PCA 1x39 T5 BASIC Ip xrttec II	TC-L	1x40 W	430 V
PCA 1x49 T5 BASIC Ip xrttec II	T5	1x49 W	430 V
PCA 1x54 T5 BASIC Ip xrttec II	T5	1x54 W	430 V
PCA 1x80 T5 BASIC Ip xrttec II	TC-L	1x55 W	430 V
PCA 1x80 T5 BASIC Ip xrttec II	T5	1x80 W	430 V
PCA 1x80 T5 BASIC Ip xrttec II	TC-L	1x80 W	430 V
PCA 2x14 T5 BASIC Ip xrttec II	T5	2x14 W	430 V
PCA 2x21 T5 BASIC Ip xrttec II	T5	2x21 W	430 V
PCA 2x24 T5 BASIC Ip xrttec II	TC-L	2x18 W	430 V
PCA 2x24 T5 BASIC Ip xrttec II	T5	2x24 W	430 V
PCA 2x24 T5 BASIC Ip xrttec II	TC-L	2x24 W	430 V
PCA 2x28 T5 BASIC Ip xrttec II	T5	2x28 W	430 V
PCA 2x35 T5 BASIC Ip xrttec II	T5	2x35 W	430 V
PCA 2x39 T5 BASIC Ip xrttec II	TC-L	2x36 W	430 V
PCA 2x39 T5 BASIC Ip xrttec II	T5	2x39 W	430 V
PCA 2x39 T5 BASIC Ip xrttec II	TC-L	2x40 W	430 V
PCA 2x49 T5 BASIC Ip xrttec II	T5	2x49 W	430 V
PCA 2x54 T5 BASIC Ip xrttec II	T5	2x54 W	430 V
PCA 2x80 T5 BASIC Ip xrttec II	TC-L	2x55 W	430 V
PCA 2x80 T5 BASIC Ip xrttec II	T5	2x80 W	430 V

Humidity: 5 % up to max. 85 %,
not condensed
(max. 56 days/year at 85 %)

Storage temperature: -40 °C up to max. +80 °C

The devices have to be within the specified temperature range (ta) before they can be operated.

Expected life-time


Type	Lamp type	Wattage		ta = 40 °C	ta = 50 °C	ta = 60 °C
PCA 1x14 T5 BASIC Ip xrttec II	T5	1 x 14 W	tc	55 °C	65 °C	75 °C
			Life-time	> 100,000 h	> 100,000 h	> 100,000 h
PCA 1x21 T5 BASIC Ip xrttec II	T5	1 x 21 W	tc	50 °C	60 °C	70 °C
			Life-time	> 100,000 h	> 100,000 h	> 100,000 h
PCA 1x24 T5 BASIC Ip xrttec II	T5	1 x 24 W	tc	55 °C	65 °C	75 °C
			Life-time	> 100,000 h	> 100,000 h	> 100,000 h
PCA 1x28 T5 BASIC Ip xrttec II	T5	1 x 28 W	tc	50 °C	60 °C	70 °C
			Life-time	> 100,000 h	> 100,000 h	> 100,000 h
PCA 1x35 T5 BASIC Ip xrttec II	T5	1 x 35 W	tc	55 °C	65 °C	75 °C
			Life-time	> 100,000 h	> 100,000 h	> 100,000 h
PCA 1x39 T5 BASIC Ip xrttec II	TC-L	1 x 36 W	tc	55 °C	65 °C	75 °C
			Life-time	> 100,000 h	> 100,000 h	> 100,000 h
PCA 1x39 T5 BASIC Ip xrttec II	T5	1 x 39 W	tc	50 °C	60 °C	70 °C
			Life-time	> 100,000 h	> 100,000 h	> 100,000 h
PCA 1x39 T5 BASIC Ip xrttec II	TC-L	1 x 40 W	tc	55 °C	65 °C	75 °C
			Life-time	> 100,000 h	> 100,000 h	> 100,000 h
PCA 1x49 T5 BASIC Ip xrttec II	T5	1 x 49 W	tc	55 °C	60 °C	70 °C
			Life-time	> 100,000 h	> 100,000 h	> 100,000 h
PCA 1x54 T5 BASIC Ip xrttec II	T5	1 x 54 W	tc	55 °C	65 °C	75 °C
			Life-time	> 100,000 h	100,000 h	90,000 h
PCA 1x80 T5 BASIC Ip xrttec II	TC-L	1 x 55 W	tc	65 °C	70 °C	80 °C
			Life-time	> 100,000 h	> 100,000 h	50,000 h
PCA 1x80 T5 BASIC Ip xrttec II	T5	1 x 80 W	tc	65 °C	70 °C	80 °C
			Life-time	> 100,000 h	> 100,000 h	50,000 h
PCA 1x80 T5 BASIC Ip xrttec II	TC-L	1 x 80 W	tc	65 °C	70 °C	80 °C
			Life-time	> 100,000 h	> 100,000 h	50,000 h
PCA 2x14 T5 BASIC Ip xrttec II	T5	2 x 14 W	tc	50 °C	60 °C	70 °C
			Life-time	> 100,000 h	> 100,000 h	> 100,000 h
PCA 2x21 T5 BASIC Ip xrttec II	T5	2 x 21 W	tc	55 °C	65 °C	75 °C
			Life-time	> 100,000 h	> 100,000 h	> 100,000 h
PCA 2x24 T5 BASIC Ip xrttec II	TC-L	2 x 18 W	tc	55 °C	65 °C	75 °C
			Life-time	> 100,000 h	> 100,000 h	90,000 h
PCA 2x24 T5 BASIC Ip xrttec II	T5	2 x 24 W	tc	55 °C	65 °C	75 °C
			Life-time	> 100,000 h	> 100,000 h	90,000 h
PCA 2x24 T5 BASIC Ip xrttec II	TC-L	2 x 24 W	tc	55 °C	65 °C	75 °C
			Life-time	> 100,000 h	> 100,000 h	90,000 h
PCA 2x28 T5 BASIC Ip xrttec II	T5	2 x 28 W	tc	55 °C	60 °C	70 °C
			Life-time	> 100,000 h	> 100,000 h	> 100,000 h
PCA 2x35 T5 BASIC Ip xrttec II	T5	2 x 35 W	tc	55 °C	65 °C	75 °C
			Life-time	> 100,000 h	> 100,000 h	80,000 h
PCA 2x39 T5 BASIC Ip xrttec II	TC-L	2 x 36 W	tc	60 °C	70 °C	80 °C
			Life-time	> 100,000 h	> 100,000 h	90,000 h
PCA 2x39 T5 BASIC Ip xrttec II	T5	2 x 39 W	tc	60 °C	70 °C	80 °C
			Life-time	> 100,000 h	> 100,000 h	70,000 h
PCA 2x39 T5 BASIC Ip xrttec II	TC-L	2 x 40 W	tc	60 °C	70 °C	80 °C
			Life-time	> 100,000 h	> 100,000 h	80,000 h
PCA 2x49 T5 BASIC Ip xrttec II	T5	2 x 49 W	tc	65 °C	70 °C	80 °C
			Life-time	> 100,000 h	80,000 h	50,000 h
PCA 2x54 T5 BASIC Ip xrttec II	T5	2 x 54 W	tc	65 °C	75 °C	x
			Life-time	> 100,000 h	70,000 h	x
PCA 2x80 T5 BASIC Ip xrttec II	TC-L	2 x 55 W	tc	65 °C	75 °C	x
			Life-time	> 100,000 h	80,000 h	x
PCA 2x80 T5 BASIC Ip xrttec II	T5	2 x 80 W	tc	65 °C	70 °C	x
			Life-time	> 100,000 h	80,000 h	x

x = not permitted

Installation instructions


Wiring type and cross section

The wiring can be solid cable with a cross section of 0.5 to 1.5 mm². For the push-wire connection you have to strip the insulation (8–9 mm).



Release of the wiring

Loosen wire through twisting and pulling or using a Ø 1 mm release tool.



Wiring advice

The lead length is dependent on the capacitance of the cable.

Ballast Type	Terminal	Maximum capacitance allowed			
		Cold		Hot	
PCA 1xx T5 BASIC Ip xitec II		13, 14	15, 16	200 pF	100 pF
PCA 2xx T5 BASIC Ip xitec II		12, 13, 14	10, 11, 15, 16	200 pF	100 pF

With standard solid wire 0.5/0.75 mm² the capacitance of the lead is 30–80 pF/m. This value is influenced by the way the wiring is made.

Lamp connection should be made with symmetrical wiring.

Hot leads (10, 11, 15, 16) and cold leads (12, 13, 14) should be separated as much as possible.


When using two or more dimmable ballasts in one luminaire with separate dimming controls, the lamp leads must be kept separate.

Sensor wires


Sensor wires must be routed separately from the lamp wires and mains cables otherwise the lighting control system may malfunction.

If separate routing is not possible (for reasons of space) shielded lamp wires and mains cables must be used.

Dimmable ballasts from Tridonic have to be earthed.

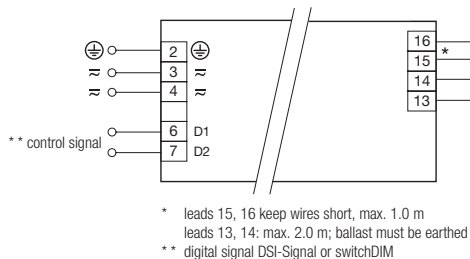

PCA T5 BASIC Ip xitec II 1x14–80 W

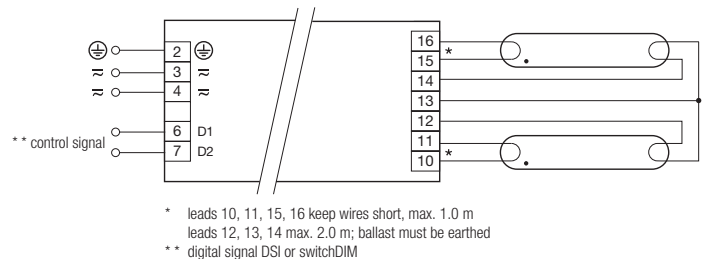

PCA T5 BASIC Ip xitec II 2x14–80 W

Dimmable ballasts from Tridonic have to be earthed.

RFI


- Connection to the lamps of the hot leads must be kept as short as possible
- Mains leads should be kept apart from lamp leads (ideally 5–10 cm distance)
- Do not run mains leads adjacent to the electronic ballast
- Twist the lamp leads
- Keep the distance of lamp leads from the metal work as large as possible
- Mains wiring to be twisted when through wiring
- Keep the mains leads inside the luminaire as short as possible

General advise

Electronic ballasts are virtually noise free. Magnetic fields generated during the ignition cycle can cause some background noise but only for a few milliseconds.

Operation on DC voltage

Our ballasts are constructed to operate DC voltage and pulsed DC voltage. To operate ballasts with pulsed DC voltage the polarity is absolute mandatory.



Isolation and electric strength testing of luminaires

Electronic devices can be damaged by high voltage. This has to be considered during the routine testing of the luminaires in production.

According to IEC 60598-1 Annex Q (informative only!) or ENEC 303-Annex A, each luminaire should be submitted to an isolation test with 500 V DC for 1 second. This test voltage should be connected between the interconnected phase and neutral terminals and the earth terminal. The isolation resistance must be at least 2 MΩ.

As an alternative, IEC 60598-1 Annex Q describes a test of the electrical strength with 1500 V AC (or 1.414 x 1500 V DC). To avoid damage to the electronic devices this test must not be conducted.

① For further technical information please visit www.tridonic.com