


LENS | 0200-ASYMMETRIC

LENS | O200-ASYMMETRIC

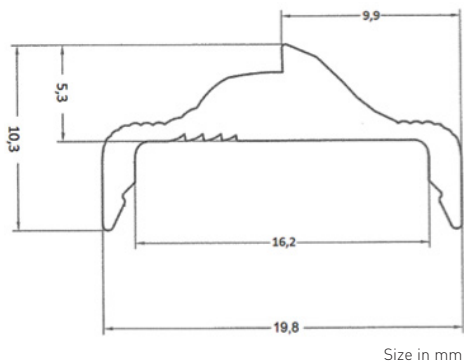

PRODUCT DESCRIPTION

- Linear lens for PROFILES Z200-2, Z201-2, Z22W-2 and Z40-1
- For use exclusively with LED modules
- No tools required for installing
- Beam angle 30° asymmetric
- Uniform distribution of light
- Material: PMMA
- UV-resistant

TECHNICAL DATA

Length	2,020 ¹ mm
Coefficient of linear expansion	85 * 10 ⁻⁶ / K
Operating temperature	-30 ... +80 °C
Storage temperature ts	-30 ... +80 °C
¹ Tolerance length:	-0 mm / +20 mm

RoHS


ORDERING DATA - LENS | O200-asymmetric

Colour	Transmission	Weight	Type	Art. Nr.
Semi-transparent	90 %	0.17 kg	LED O200 LINEAR LENS asymmetric frosted - 2,02m	24166412

Packaging: 5 pieces/carton, 125 pices/pallet

OPTICAL PROPERTIES

Light distribution - Asymmetric Lens

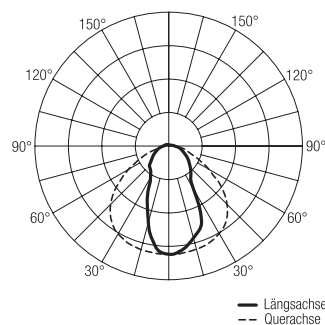

Mounting notes

- The lens has to be snapped onto the profile.

STANDARDS

- EN 60598-1
The lens passed the heat filament test with 650°C as required in EN 60598-1