


 Create pdf

Lampholders for low voltage halogen lamps

25.105.6101

GU5.3 / Connector GX5.3

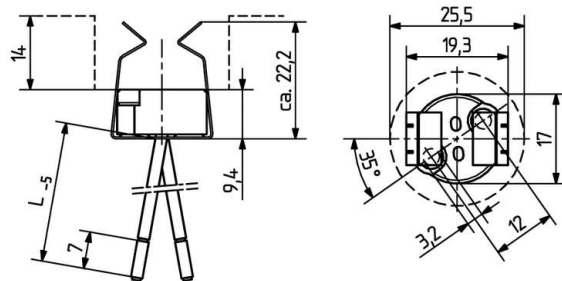

pkg.	wt.	part no.
500	9 g	25.105.6101.00

Connection: Rear cable entry

Wires: Cu, nickel plated, 18 AWG, insulation: PTFE (max. 250° C), with ferrule, free cable length: 250 mm

Approval: only cURus

Screw fixing

Housing: Ceramic / Mica plate

Contacts: Ni

- The method of wiring must be such that no stress or bending motions will be transferred to the contacts, thus reducing the contact / pressure on the lamp pins.
- Other versions on request.

250°C	10 A 50 V
-------	--------------

Document generated on: Th, 9. February 2017 - 15:26