




Lampholders and starter holders

26.290.5022

G13 Push through lampholders

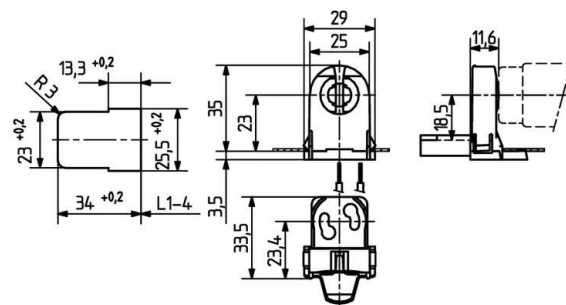

L1-4: Recommended dimension - The distance between the cut-outs and the tolerance should be governed by the dimensions of the respective lamps and luminaires.

colour	pkg.	wt.	part no.
white	250	10 g	26.290.5022.50

With starter holder

Approval: additional cULus (660W /600V)







Lamp centre: 23 mm

Push fixing

Housing: PC

Rotor: PBT

- For enclosed cut-outs
- A pair of lampholders provides a lamp length tolerance compensation of 3 mm

T 130	Tm 110				 18 AWG 0.5 - 1.0 mm ²	 0.5 - 1.3	
-------	--------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------

Document generated on: Th, 9. February 2017 - 13:10