

BTICINO > Smart Home solutions > My Home > Burglar Alarm







F454

Audio/video web server for the remote control of the system using web pages or the MY HOME portal. The device can operate as a gateway for the use of the MHVisual and Virtual Configurator software - 6 DIN modules. It replaces item F453 and F453AV

Technical features

Brand	BTicino
Rated voltage	27Vdc
Rated current	0125A
N° of modules	6
Series	MyHome

Documentation

-  [Technical Data Sheet](#)
-  [Software Manual](#)
-  [User Manual](#)
-  [Technical guide](#)

GROUP BRAND LEGRAND: | **bticino** | **IME** | Netatmo |

We, Bticino S.p.A Viale Borri 231 21100 Varese (Italy), declare that all items listed in Bticino catalogues, have been manufactured in compliance with the principal elements of safety objectives of European Directive said LVD: 2014/35/EU: 26 February 2014 and, where requested, also in compliance with essential protection requirements of electromagnetic compatibility according to European Directive 2014/30/EU: 26 February 2014, and/or where requested also in compliance with 1995/5/CE: 9 March 1999 "R&TTE" or where requested also in compliance with 2014/53/EU: 16 April 2014 "RED". Bticino S.p.A. products are in compliance with the standard published by the International Electrotechnical Commission (IEC). The compliance can be proved by Certificates issued by organizations recognized by IEC according to the CB-scheme. Our items comply with relevant European Product- Standards and show, whether provided, CE marking, they have been constructed in accordance with good engineering practice in safety matters in force in the Community, they do not endanger the safety of persons, domestic animals or property when properly installed and maintained and used in applications for which they were made.

Description

Audio/Video Web Server for local and remote control of MY HOME applications using dedicated web pages.

The Web Server can also be used as a gateway for the management of the system using devices like PCs and Smartphones, and for virtual configuration, using a dedicated software.

Technical data


Power supply from SCS BUS: 18 – 27 Vdc
Absorption: 125 mA max (with active video interface)
Operating temperature: 5 – 35 °C

Dimensional data

6 DIN modules

Configuration

The Audio/Video Web Server should be configured using the MyHOME_Suite software, which is available to download from the website www.homesystems-legrandgroup.com.

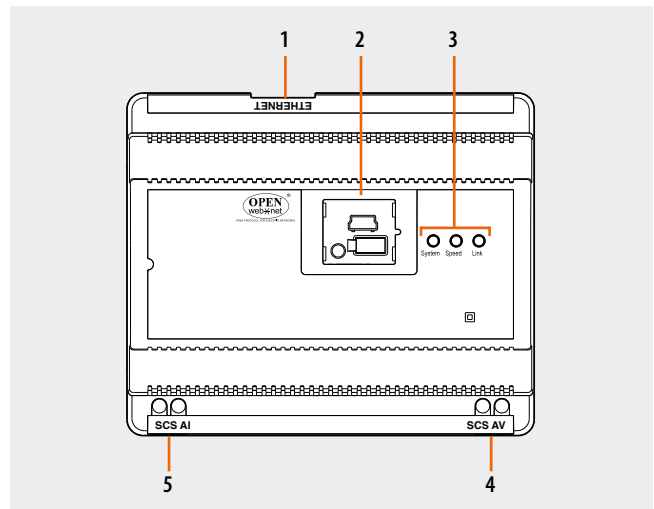

Legend

1. RJ 45 for 10/100Mbit Ethernet LAN
2. Under the door are:
 - USB ports for PC configuration and Firmware update
 - RESET pushbutton
 - Serial connector RS232
3. User interface:
 - Speed: Connection speed; ON = 100 Mbit; OFF = 10 Mbit
 - Link: ON it indicates the presence of the Ethernet network
 - System: when the power supply is connected, it comes on, goes off, and then comes on again, to indicate that the web server is working
4. 2-wire BUS for video door entry system connection
5. 2-wire BUS for burglar alarm system