


 Create pdf

## Lampholders for compact fluorescent lamps

26.745.1961

G24 / GX24

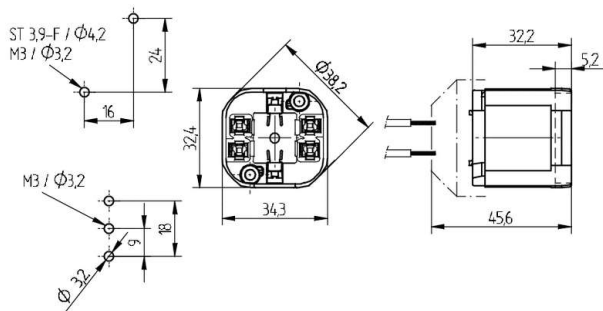

colour	pkg.	wt.	part no.
white	250	14 g	26.745.1961.50

Key: q-2 (18 Watt) / q-6 (70 Watt)\*\*\*

Approval: additional cULus

For lamps TC-DEL, TC-TEL


Screw fixing




Einclipbefestigung

Housing: PBT

\*\*\*Key q-6 only when used with adaptor 26.725.-420

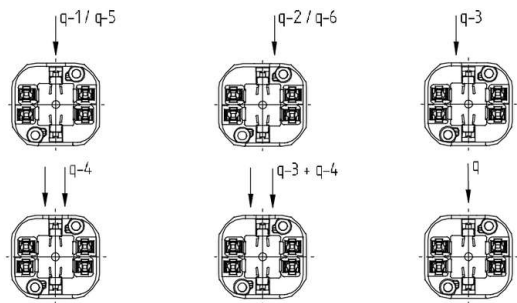- Plain barrel
- Screw fixing vertical, diagonal: two holes  $\varnothing$  3.2 mm
- Panel cut-out: 2 holes, distance 16 / 24, for self-tapping screws ISO 1481 - ST 3.9 - F
- Screw fixing central, vertical: one hole  $\varnothing$  3.2 mm and 2 anti rotation slots
- Panel cut-out: three holes 2 x 9 = 18 mm, for screws ISO 1207 - M3
- Rivet fixing: we recommend blind rivet  $\varnothing$  3.0 mm according to DIN 7337 (Aluminium / Steel flat round head) max. pull force 500 N



T 140		 0.5 - 1.0 mm <sup>2</sup>	 18 AWG 0.5 - 1.0 mm <sup>2</sup>
-------	---	--	--

Document generated on: We, 8. February 2017 - 16:51