



**TALEXmodule SLE G4 FASHION EXC**  
TALEXmodule SLE

## Product description

- Optimized light spectrum for perfect fashion presentation
- Housing with Snap-On feature for easy reflector mounting
- LED-solution with uniquely brilliant colour impression
- Warm, thrilling colours with a high saturation combined with a pure and shiny white
- Luminous flux up to 4,650 lm at  $t_p = 65\text{ }^\circ\text{C}$
- For spotlights and downlights
- BLO operation mode: Best LED Operation for optimum operation and constant luminous flux at all colour temperatures in combination with Tridonic LED Driver of TOP and ECO series
- High colour consistency (MacAdam 3)
- Small LES (light emitting surface) diameter enables small beam angle for spotlights
- Excellent thermal management by COB technology
- Uniform radiation with Dam&Fill technology
- Fixing holes for M3 screws
- Integrated LED module
- Cooling required
- Flexible operating modes
- 5-year guarantee



**Standards**, page 4

**Colour temperatures and tolerances**, page 9







**TALEXmodule SLE G4 FASHION EXC**  
TALEXmodule SLE

**Technical data**

Beam characteristic	115°
Ambient temperature range	-25 ... +50 °C
tp rated	65 °C
tc <sup>①</sup>	up to 100 °C
Max. DC forward current for LES19 <sup>②</sup>	1,400 mA
Max. DC forward current for LES23 <sup>②</sup>	1,750 mA
Max. permissible LF current ripple for LES19	1,680 mA
Max. permissible LF current ripple for LES23	2,400 mA
Max. permissible peak current for LES19	3,360 mA / max. 10 ms
Max. permissible peak current for LES23	4,800 mA / max. 10 ms
Max. permissible output voltage of LED Driver for LES19 <sup>③</sup>	75 V
Max. permissible output voltage of LED Driver for LES23 <sup>③</sup>	75 V
Insulation test voltage for LES19	1.15 kV
Insulation test voltage for LES23	1.15 kV
ESD classification	severity level 4
Risk group (EN 62471:2008)	1
Type of protection	IP00

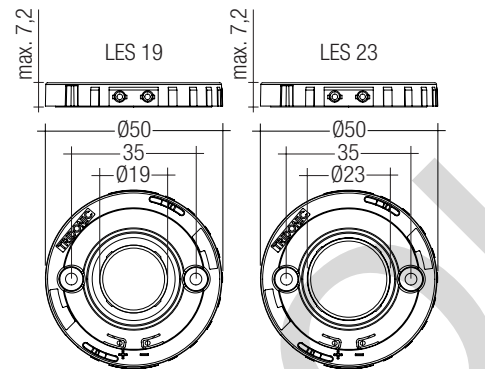

With housing (tc/tp position same as without housing) – Dimensions in mm

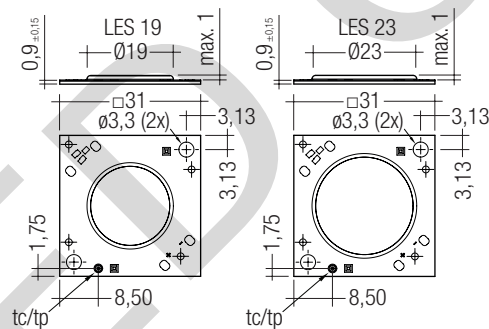

Dimensions in mm

**Ordering data**

Type	Article number	Colour temperature	Housing	Connection cable	Packaging	Weight per pc.
SLE G4 19mm 3000lm FASHION C EXC	89602052	3,250 K	no	yes	20 pc(s).	0.009 kg
SLE G4 23mm 5000lm FASHION C EXC	89602053	3,250 K	no	yes	20 pc(s).	0.009 kg
SLE G4 19mm 3000lm FASHION H EXC	89602050	3,250 K	yes	no	50 pc(s).	0.009 kg
SLE G4 23mm 5000lm FASHION H EXC	89602051	3,250 K	yes	no	50 pc(s).	0.009 kg

### Specific technical data

Type <sup>®</sup>	Photometric code	Forward current	Luminous flux at tp = 25 °C <sup>®</sup>	Luminous flux at tp = 65 °C <sup>®</sup>	Power consumption <sup>®</sup> <sup>®</sup>	Min. forward voltage at tp = 65 °C	Max. forward voltage at tp = 25 °C	Colour rendering index CRI	Energy classification
<b>SLE G4 19mm 3000lm – Operating mode HE at 500 mA</b>									
SLE G4 19mm 3000lm FASHION EXC	932/3x9	500 mA	1,740 lm	1,590 lm	16.4 W	29.8 V	34.6 V	90	A+
<b>SLE G4 19mm 3000lm – Operating mode NM at 1,050 mA</b>									
SLE G4 19mm 3000lm FASHION EXC	932/3x9	1,050 mA	3,390 lm	2,940 lm	37.6 W	33.4 V	38.8 V	90	A
<b>SLE G4 19mm 3000lm – Operating mode HO at 1,400 mA</b>									
SLE G4 19mm 3000lm FASHION EXC	932/3x9	1,400 mA	4,330 lm	3,600 lm	52.6 W	35.1 V	40.7 V	90	A
<b>SLE G4 23mm 5000lm – Operating mode HE at 700 mA</b>									
SLE G4 23mm 5000lm FASHION EXC	932/3x9	700 mA	2,430 lm	2,240 lm	22.9 W	30.5 V	35.4 V	90	A+
<b>SLE G4 23mm 5000lm – Operating mode NM at 1,400 mA</b>									
SLE G4 23mm 5000lm FASHION EXC	932/3x9	1,400 mA	4,550 lm	3,980 lm	49.3 W	32.9 V	38.2 V	90	A
<b>SLE G4 23mm 5000lm – Operating mode HO at 1,750 mA</b>									
SLE G4 23mm 5000lm FASHION EXC	932/3x9	1,750 mA	5,510 lm	4,650 lm	63.8 W	34.0 V	39.4 V	90	A

<sup>®</sup> See Derating curves in data sheet section 2.3.

<sup>®</sup> Max. DC forward current varies over the temperature of the LED module. See derating curves in data sheet section 2.3.

<sup>®</sup> The detailed explanation, see data sheet section 3.1.

<sup>®</sup> Tolerance range for optical and electrical data: ±10 %.

<sup>®</sup> All values at tp = 65 °C.

<sup>®</sup> HE ... high efficiency, NM ... nominal mode, HO ... high output.

## 1. Standards

EN 62031  
EN 62471  
IEC 62717  
IEC 61000-4-2

### 1.1 Glow wire test

according to EN 62031 with increased temperature of 960 °C passed.

### 1.2 Photometric code

Key for photometric code, e. g. 930 / 369

1 <sup>st</sup> digit	2 <sup>nd</sup> + 3 <sup>rd</sup> digit	4 <sup>th</sup> digit	5 <sup>th</sup> digit	6 <sup>th</sup> digit	
Code	CRI	Colour temperature in Kelvin x 100	McAdam after 25% of the life-time (max.6000h)	Luminous flux after 25% of the life-time (max.6000h)	
7	70 – 79			Code	Luminous flux
8	80 – 89	McAdam initial	25% of the life-time (max.6000h)	7	≥ 70 %
9	≥90			8	≥ 80 %
				9	≥ 90 %

### 1.3 Energy classification

Type	Forward current	Energy classification
SLE G4 19mm 3000lm FASHION EXC	500 mA	A+
	1.050 mA	A
	1.400 mA	A
SLE G4 23mm 5000lm FASHION EXC	700 mA	A+
	1.400 mA	A
	1.750 mA	A

## 2. Thermal details


### 2.1 tp point, ambient temperature and life-time

The temperature at tp reference point is crucial for the light output and life-time of a TALEX product.

For TALEX(module SLE G4 a tp temperature of 65 °C has to be complied in order to achieve an optimum between heat sink requirements, light output and life-time.

Compliance with the maximum permissible reference temperature at the tp point must be checked under operating conditions in a thermally stable state. The maximum value must be determined under worst-case conditions for the relevant application.

To check the tc / tp temperature, the temperature sensor has to be mounted on the PCB at the marked position as stated in the drawing.

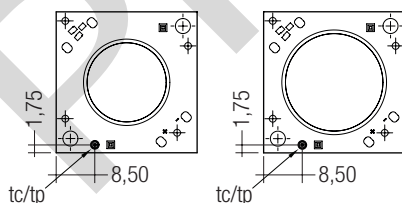

## 2.2 Storage and humidity


storage temperature	-30 ... +80 °C
---------------------	----------------

Operation only in non condensing environment.


Humidity during processing of the module should be between 30 to 70 %.

## 2.3 Derating curves

### SLE G4 19mm 3000lm FASHION EXCITE

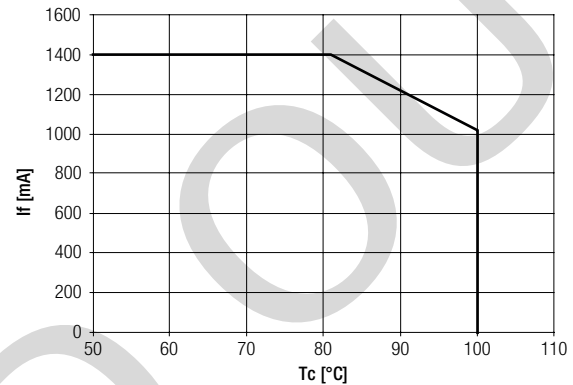

### SLE G4 23mm 5000lm FASHION EXCITE

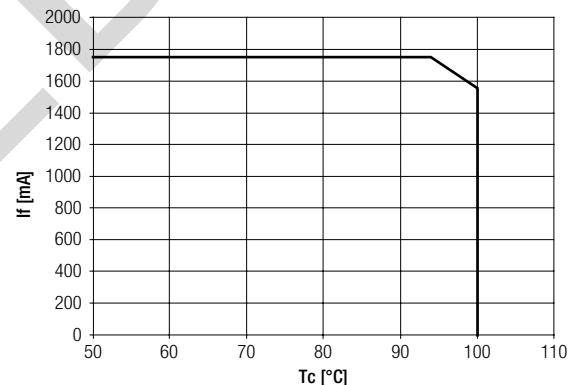

## 2.4 Thermal design and heat sink

The rated life of TALEX products depends to a large extent on the temperature. If the permissible temperature limits are exceeded, the life of the TALEX(module SLE G4 will be greatly reduced or the TALEX(module SLE G4 may be destroyed.

## 2.5 Heat sink values

### SLE G4 19mm 3000lm FASHION EXCITE

ta	tp	Operating current	R <sub>th, hs-a</sub>
25 °C	65 °C	500 mA	3.15 K/W
30 °C	65 °C	500 mA	2.74 K/W
40 °C	65 °C	500 mA	1.92 K/W
50 °C	65 °C	500 mA	1.09 K/W
25 °C	65 °C	1,050 mA	1.19 K/W
30 °C	65 °C	1,050 mA	1.02 K/W
40 °C	65 °C	1,050 mA	0.69 K/W
50 °C	65 °C	1,050 mA	0.36 K/W
25 °C	65 °C	1,400 mA	0.77 K/W
30 °C	65 °C	1,400 mA	0.66 K/W
40 °C	65 °C	1,400 mA	0.43 K/W
50 °C	65 °C	1,400 mA	0.20 K/W

### SLE G4 23mm 5000lm FASHION EXCITE

ta	tp	Operating current	R <sub>th, hs-a</sub>
25 °C	65 °C	700 mA	2.23 K/W
30 °C	65 °C	700 mA	1.94 K/W
40 °C	65 °C	700 mA	1.34 K/W
50 °C	65 °C	700 mA	0.75 K/W
25 °C	65 °C	1,400 mA	0.88 K/W
30 °C	65 °C	1,400 mA	0.75 K/W
40 °C	65 °C	1,400 mA	0.50 K/W
50 °C	65 °C	1,400 mA	0.24 K/W
25 °C	65 °C	1,750 mA	0.63 K/W
30 °C	65 °C	1,750 mA	0.53 K/W
40 °C	65 °C	1,750 mA	0.34 K/W
50 °C	65 °C	1,750 mA	0.15 K/W

## Notes

The actual cooling can differ because of the material, the structural shape, outside influences and the installation situation. A thermal connection between TALEXmodule SLE G4 and heat sink with heat-conducting paste or heat conducting adhesive film is absolutely necessary.

Additionally the TALEXmodule SLE G4 has to be fixed on the heat sink with M3 screws to optimise the thermal connection.

Use of thermal interface material with thermal conductivity of  $\lambda > 1 \text{ W/mK}$  and layer thickness of interface material with max.  $50 \mu\text{m}$  or a similar interface material where the quotient of layer thickness and thermal conductivity  $b < 50 \mu\text{mmK/W}$ .

## 3. Installation / wiring

### 3.1 Electrical supply/choice of LED Driver

TALEXmodule SLE G4 from Tridonic are not protected against overvoltages, overcurrents, overloads or short-circuit currents. Safe and reliable operation can only be guaranteed in conjunction with a LED Driver which complies with the relevant standards. The use of TALEX LED Drivers from Tridonic in combination with TALEXmodule SLE G4 guarantees the necessary protection for safe and reliable operation.

If a LED Driver other than Tridonic TALEXconverter is used, it must provide the following protection:

- Short-circuit protection
- Overload protection
- Overtemperature protection




TALEXmodule SLE G4 must be supplied by a constant current LED Driver. Operation with a constant voltage LED Driver will lead to an irreversible damage of the module. Wrong polarity can damage the TALEXmodule SLE G4.




TALEXmodule SLE G4 are basic isolated up to 75 V against ground and can be mounted directly on earthed metal parts of the luminaire. If the max. output voltage of the LED Driver (also against earth) is above 75 V, an additional isolation between LED module and heat sink is required (for example by isolated thermal pads) or by a suitable luminaire construction. At voltages  $> 60 \text{ V}$  an additional protection against direct touch (test finger) to the light emitting side of the module has to be guaranteed. This is typically achieved by means of a non removable light distributor over the module.

### 3.2 Wiring


#### Wiring with housing

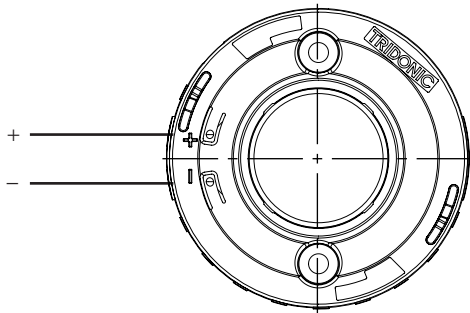

#### Wiring without housing

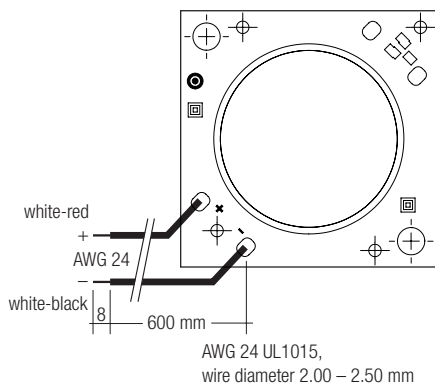

#### Wiring example

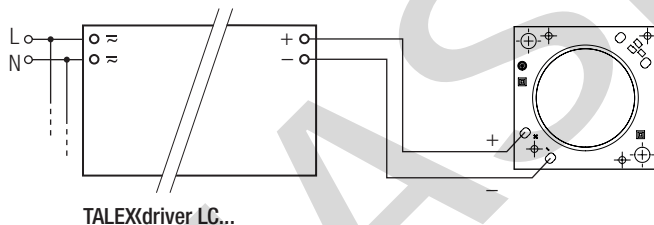


### 3.3 Wiring type and cross section

The wiring has to be solid cable with a cross section of 0.5 to 0.75 mm<sup>2</sup> or with stranded wire with soldered ends with a cross section of 0.5 mm<sup>2</sup>. For the push-wire connection you have to strip the insulation (7 – 8 mm).

Removing wires by lightly pressing on the push button.

wire preparation:



### 3.4 Mounting instruction



TALEX(module SLE G4 from Tridonic which have to be installed on a heat sink have to be connected with heat-conducting paste or heat conducting adhesive film and fixed with M3 screws.

The fixing/cooling surface must be cleaned by removing all dirt, dust and grease before installing the TALEX modules.

None of the components of the TALEX(module SLE G4 (substrate, LED, electronic components etc.) may be exposed to tensile or compressive stresses.



Max. torque for fixing: 0.5 Nm.

The LED modules are mounted with 2 screws per module. In order not to damage the modules only rounded head screws and an additional plastic flat washer should be used for LED modules without housing.

For further information please refer to the brochure entitled "Technical Design-In-Guide SLE GEN4".



Chemical substance may harm the LED module. Chemical reactions could lead to colour shift, reduced luminous flux or a total failure of the module caused by corrosion of electrical connections.

Materials which are used in LED applications (e.g. sealings, adhesives) must not produce dissolver gas. They must not be condensation curing based, acetate curing based or contain sulfur, chlorine or phthalate. Avoid corrosive atmosphere during usage and storage.

### 3.5 EOS/ESD safety guidelines



The device / module contains components that are sensitive to electrostatic discharge and may only be installed in the factory and on site if appropriate EOS/ESD protection measures have been taken. No special measures need be taken for devices/modules with enclosed casings (contact with the pc board not possible), just normal installation practice.

For further information for EOS/ESD safety guidelines and the ESD classification please refer to the brochure entitled <http://www.tridonic.com/esd-protection>.

## 4. Life-time

### 4.1 Life-time, lumen maintenance and failure rate

The light output of an LED Module decreases over the life-time, this is characterized with the L value. L70 means that the LED module will give 70 % of its initial luminous flux. This value is always related to the number of operation hours and therefore defines the life-time of an LED module.

As the L value is a statistical value and the lumen maintenance may vary over the delivered LED modules. The B value defines the amount of modules which are below the specific L value, e.g. L70B10 means 10 % of the LED modules are below 70 % of the initial luminous flux, respectively 90 % will be above 70 % of the initial value. In addition the percentage of failed modules (fatal failure) is characterized by the C value.

The F value is the combination of the B and C value. That means for F degradation and complete failures are considered, e.g. L70F10 means 10 % of the LED modules may fail or be below 70 % of the initial luminous flux.

### 4.2 Lumen maintenance

#### SLE G4 19mm 3000lm FASHION EXCITE

Operating current	tp temperature	L90 / F10	L90 / F50	L80 / F10	L80 / F50	L70 / F10	L70 / F50
500 mA	65 °C	57,000 h	>60,000 h	>60,000 h	>60,000 h	>60,000 h	>60,000 h
	75 °C	42,000 h	>60,000 h	>60,000 h	>60,000 h	>60,000 h	>60,000 h
	85 °C	32,000 h	48,000 h	>60,000 h	>60,000 h	>60,000 h	>60,000 h
1,050 mA	65 °C	42,000 h	>60,000 h	>60,000 h	>60,000 h	>60,000 h	>60,000 h
	75 °C	31,000 h	46,000 h	>60,000 h	>60,000 h	>60,000 h	>60,000 h
	85 °C	23,000 h	35,000 h	50,000 h	>60,000 h	>60,000 h	>60,000 h
1,400 mA	65 °C	32,000 h	48,000 h	>60,000 h	>60,000 h	>60,000 h	>60,000 h
	75 °C	24,000 h	36,000 h	50,000 h	>60,000 h	>60,000 h	>60,000 h
	85 °C	18,000 h	27,000 h	38,000 h	57,000 h	>60,000 h	>60,000 h


#### SLE G4 23mm 5000lm FASHION EXCITE

Operating current	tp temperature	L90 / F10	L90 / F50	L80 / F10	L80 / F50	L70 / F10	L70 / F50
700 mA	65 °C	58,000 h	>60,000 h	>60,000 h	>60,000 h	>60,000 h	>60,000 h
	75 °C	43,000 h	>60,000 h	>60,000 h	>60,000 h	>60,000 h	>60,000 h
	85 °C	32,000 h	49,000 h	>60,000 h	>60,000 h	>60,000 h	>60,000 h
1,400 mA	65 °C	45,000 h	>60,000 h	>60,000 h	>60,000 h	>60,000 h	>60,000 h
	75 °C	33,000 h	50,000 h	>60,000 h	>60,000 h	>60,000 h	>60,000 h
	85 °C	25,000 h	38,000 h	53,000 h	>60,000 h	>60,000 h	>60,000 h
1,750 mA	65 °C	38,000 h	58,000 h	>60,000 h	>60,000 h	>60,000 h	>60,000 h
	75 °C	29,000 h	43,000 h	>60,000 h	>60,000 h	>60,000 h	>60,000 h
	85 °C	22,000 h	32,000 h	46,000 h	>60,000 h	>60,000 h	>60,000 h


## 5. Electrical values

### 5.1 Typ. forward voltage vs. forward current at $t_p = 65^\circ\text{C}$


SLE G4 19mm 3000lm FASHION EXCITE

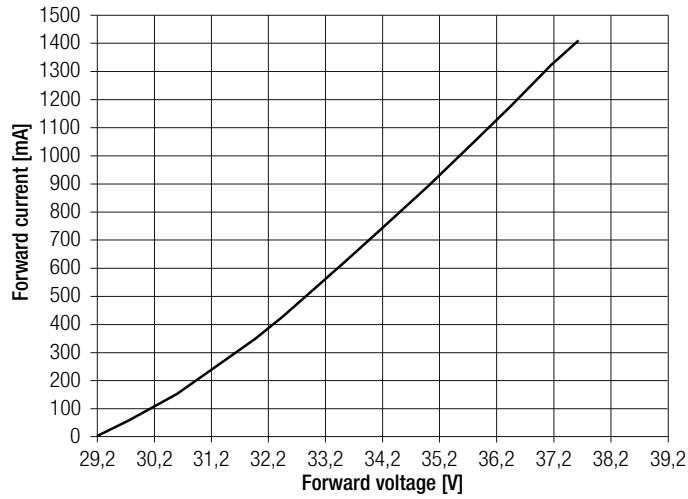

SLE G4 23mm 5000lm FASHION EXCITE

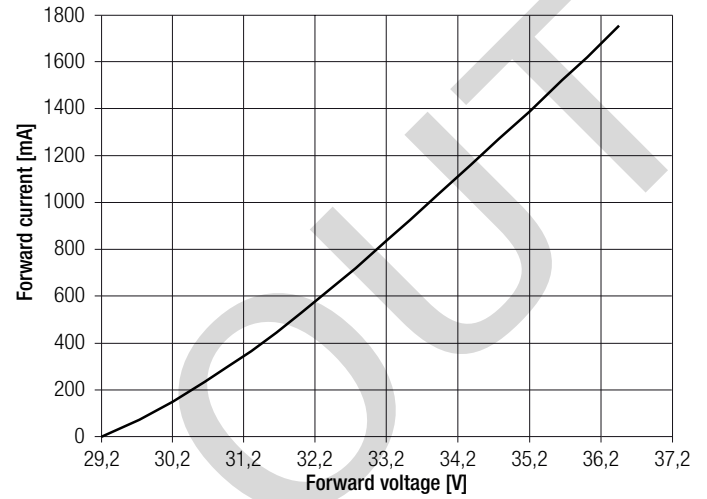

### 5.2 Forward voltage vs. $t_p$ temperature

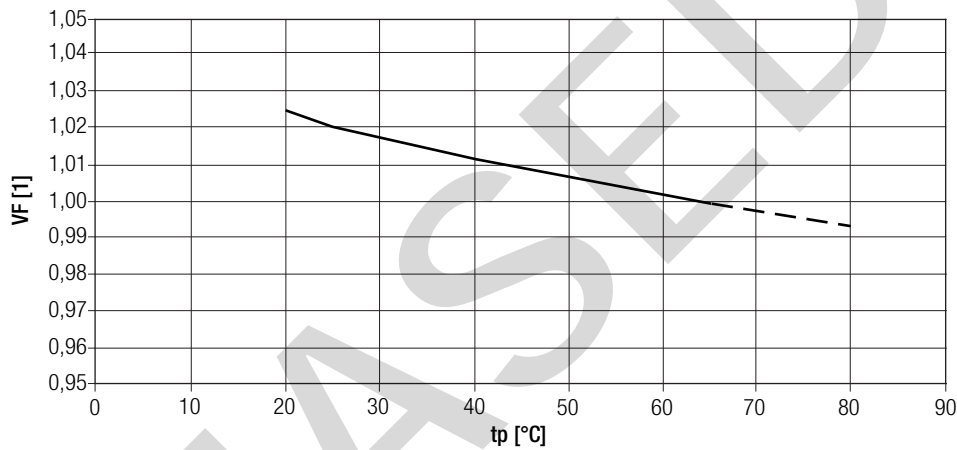

The diagrams based on statistic values.  
The real values can be different.



## 6. Photometric characteristics

### 6.1 Coordinates and tolerances according to CIE 1931


The specified colour coordinates are measured integral after a settling time of 100 ms. The current impulse depends on the module type.

Module type	Current impulse
TALEXmodule SLE G4 19mm 3000lm FASHION EXC	1,050 mA
TALEXmodule SLE G4 23mm 5000lm FASHION EXC	1,400 mA

The ambient temperature of the measurement is  $t_a = 25\text{ °C}$ .  
The measurement tolerance of the colour coordinates are  $\pm 0.01$ .

3,250 K


	x0	y0
Centre	0.4177	0.3918

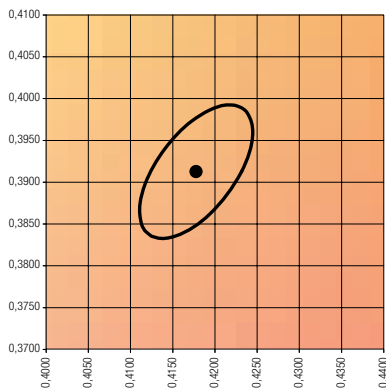

MacAdam ellipse: 3SDCM

## 6.2 Light distribution

The optical design of the TALEX module SLE product line ensures optimum homogeneity for the light distribution.

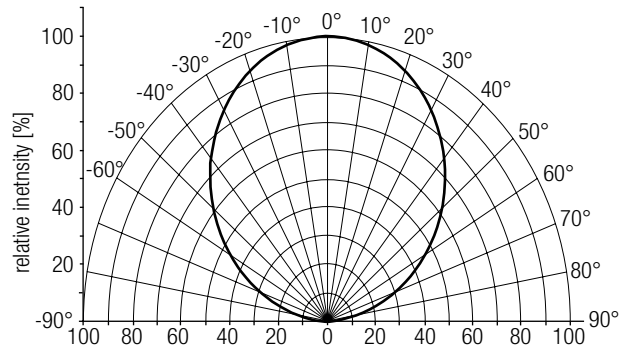

For further information see Design-in Guide, 3D data and photometric data on [www.tridonic.com](http://www.tridonic.com) or on request.

## 6.3 Relative luminous flux vs. $t_p$ temperature

